




DIVERSION BOOM

OBJECTIVE & STRATEGY

DV

The objective of the Diversion Boom tactic is to redirect the spilled oil from one location or direction of travel to a specific site for recovery. For the purposes of maintaining consistent and clear terms, diversion is always associated with oil recovery, in contrast with the term deflection, which is used to describe the tactic where oil is redirected away from an area but not recovered.

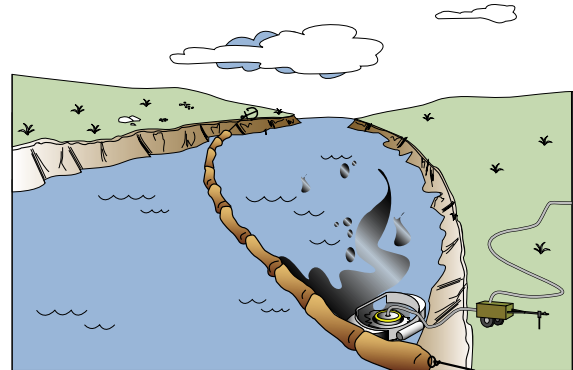

TACTIC DESCRIPTION

The Diversion Boom tactic is for water-born spills where there is some current, usually from 0.5 to 3.0 knots. The boom is placed at an optimum angle to the oil trajectory, using the movement of the current to carry oil along the boom to a recovery location. The angle is chosen to prevent oil from entraining beneath the boom skirt. Oil can be diverted to a shoreline or away from a shoreline or shoal waters. This tactic is always associated with a recovery tactic, either Shoreside Recovery or Marine Recovery. Boom may be held in place by anchors, vessels, or a boom control device.

Anchor Systems

Boom is secured in place using standard anchoring systems (Figure DV-1). Anchor sizes vary depending on the boom type and the operating environment.

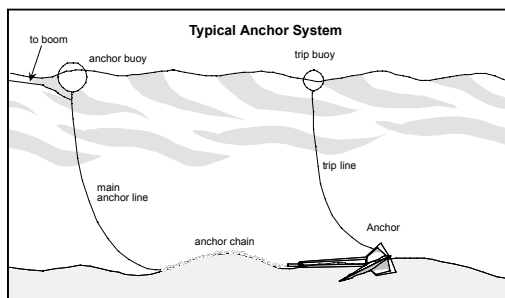


Figure DV-1. Typical anchor system.

Boom Control Devices

An alternative to anchoring deflection boom on the offshore end are boom control devices. Boom control devices have the advantage of allowing continuous control over the angle and position of the boom. They can also allow the boom to be moved to allow a vessel or drifting debris

to pass by without interfering with the diversion operation. One type of boom control device is a vessel, which continuously controls the offshore end of the boom. Controlling a diversion boom with a vessel

Diversion Boom

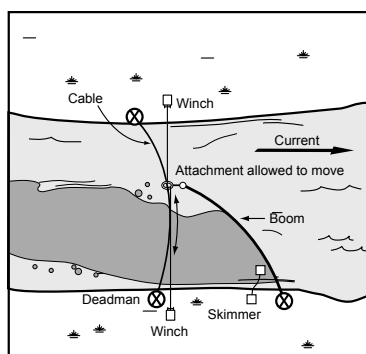


Figure DV-2. Diversion boom configuration using a trolley.

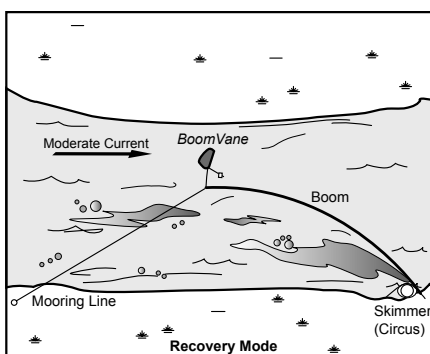


Figure DV-3. Diversion boom configuration using a BoomVane™.

takes considerable skill and a vessel suited for the purpose. Another type of boom control system is a trolley as shown in Figure DV-2. Trolleys require that a line be strung from one shoreline to another, thus they are mostly used in rivers. Trolleys may

block a river to passage by vessels and they are susceptible to impacts from debris. A relatively new type of boom control device is built on the principle of a wing or rudder. Devices such as the Boom Vane™, allow the boom to be deployed and controlled from the shoreline (Figure DV-3). This decreases the need for vessels and anchor systems, while allowing superior control of the boom angle.

Tidal-seal Boom

A special type of boom, tidal-seal boom, is used on some boom arrays where the array contacts the shoreline to prevent oil from escaping. Tidal-seal boom typically contains three chambers as shown in Figure DV-4. Two of the chambers are filled with water, and contact the shoreline in shallow water and shoreline areas. The third chamber

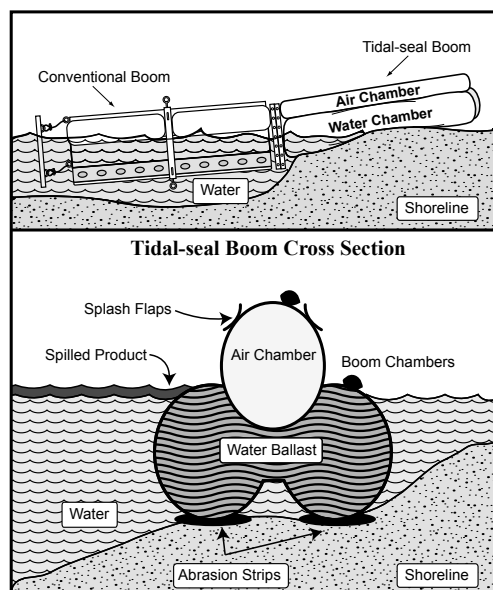


Figure DV-4. Tidal-seal boom configuration.

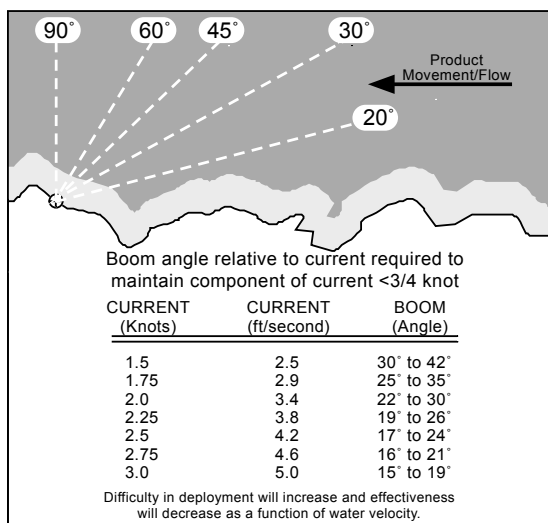


Figure DV-5. Boom angles for various current velocities.

is usually filled with air, and provides flotation as the water level rises. Tidal-seal boom should be used in areas with a smooth bottom of gradual slope and avoided where there are large locks and sharp breaks in the bottom.

Boom Angle

Figure DV-5 is used to select the appropriate boom angle to keep oil from entraining under the boom. Note that the angle relative to the current decreases rapidly as the current increases. Where currents exceed 3 knots the boom must be almost parallel to the current to prevent entrainment.



In currents exceeding 3 knots, a cascade of boom arrays may be used; the first boom array will slow the velocity of the slick allowing subsequent arrays to deflect the oil.

Operating Environments

OPEN WATER

Diversion Boom is rarely used in the open water environment. Diversion Boom system components (vessels, boom and anchors) for open water operations should be able to deploy and operate in seas up to 6 feet and in winds of up to 30 knots. For safety, vessels should be able to transit seas up to 12 feet with winds up to 45 knots. Open water systems are usually deep draft, operating at depths of greater than 6 feet.

PROTECTED WATER

Vessels, boom and anchors for protected water Diversion Boom systems should be able to deploy and operate in seas up to 3 feet and winds up to 25 knots. Vessels should be able to transit seas up to 6 feet with winds up to 30 knots for safety. Protected water diversion boom systems are often based on vessels of opportunity, such as fishing vessels. Protected water systems may be deep draft or shallow draft, depending on the water body.

CALM WATER

Calm water free-oil recovery systems are composed of vessels, booms and skimmers that should be able to deploy and operate in seas of 1 foot and winds up to 15 knots. Vessels should be able to transit seas up to 3 feet with winds up to 20 knots for safety. Calm water diversion boom systems are usually based on small fishing vessels, work-boats or skiffs fitted with portable skimmers and primary storage devices. Calm water diversion boom systems typically work in depths as shallow as 3 feet.

FAST WATER

Fast water deflection boom systems are designed to operate in moving water where the current exceeds 0.8 knots. This includes rivers and areas with significant tidal current. Vessels, boom and anchors used in tidal waters should be able to deploy and operate in seas up to 1 foot in winds up to 15 knots. Vessels, boom and anchors used in river waters should be able to deploy and operate in waves up to 2 feet in winds up to 15 knots. For safety, vessels operating in tidal waters or large rivers should be able to transit seas to 4 feet in winds up to 20 knots. Fast-water diversion boom systems are equipped with high-current boom and skimmers. These systems are usually deployed from small vessels or skiffs.

BROKEN ICE

Diversion Booming is not recommended for broken ice operating environments.

Diversion Boom



Deployment Configurations

There are many variations for deployment of Diversion Boom. Several configurations are described below, but responders should consider the actual conditions and modify their deployment accordingly.

SINGLE BOOM – DIVERT INSHORE

A basic diversion technique is to divert oil from a current to a recovery site along a shoreline. The recovery site is chosen where there is minimal current (an eddy, quiet water, or collection beach) and a suitable recovery system can be deployed. In some cases, with approval, a trench can be dug to create a quiet skimming area. The boom is then anchored at the site and deployed at an optimum angle to the current and secured/anchored to divert the oil to for recovery. Boom can be secured with an anchor in the water, an anchor on a far shore, a boom control device or with a vessel.

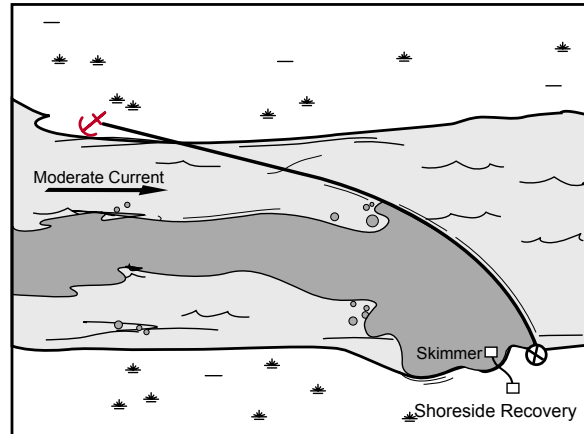


Figure DV-6. Single boom diversion configuration.

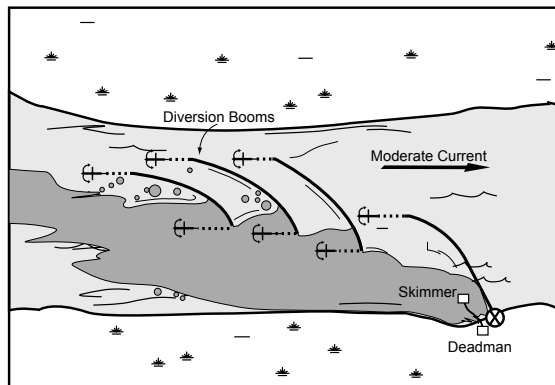


Figure DV-7. Cascade boom diversion configuration.

DIVERT OFFSHORE

A single boom can also be set to divert oil away from the shore or shoal water where it can be recovered by On-water Free-oil Recovery or Marine Recovery

CASCADE

Several booms can be deployed in a cascade configuration when a single boom cannot be used because of fast current or because it is necessary to leave openings in the boom for vessel

traffic, etc. This configuration can be used in strong currents where it may be impossible to effectively deploy one continuous section of boom. Shorter sections of boom when used in a cascade deployment are easier to handle in faster water, thereby increasing safety and efficiency. Additional equipment will be required to set and maintain this system in comparison to the single boom configuration.

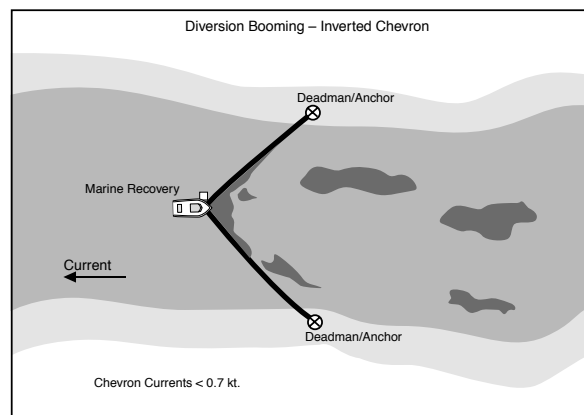


Figure DV-8. Inverted chevron diversion boom configuration

**CHEVRON**

Chevron boom configurations may be used in fast water. Two booms are deployed from an anchor in the middle of the stream/river and then attached to each bank. A closed chevron configuration is used to divide a slick for diversion to two or more recovery areas. An open chevron can be used where boat traffic must be able to pass. In the open chevron configuration the two booms are anchored separately midstream, with one anchor point up-stream or downstream of the other. An inverted chevron can also be used to funnel the oil slick to a marine recovery unit anchored mid-channel.

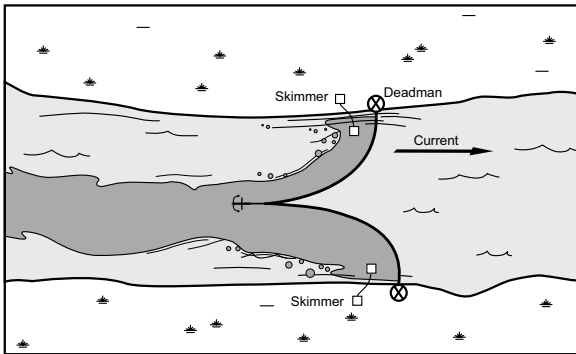


Figure DV-9. Closed chevron diversion configuration.

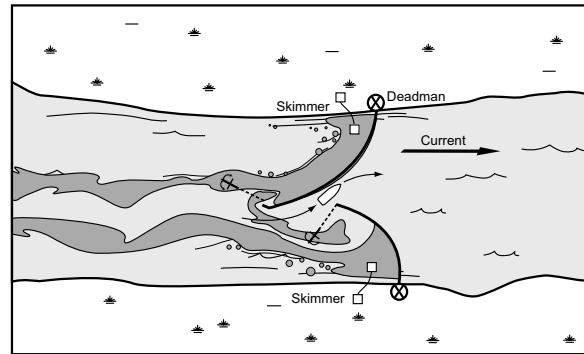


Figure DV-10. Open chevron diversion configuration.

DEPLOYMENT CONSIDERATIONS AND LIMITATIONS

- + Daily fair and foul weather evaluations are recommended, and should include distance to safe harbor, transit times and exposure of vessels.
- + Vessel masters should have experience in the appropriate operating environment and local knowledge is preferred.
- Calm/Protected/Fast water environments are most commonly used for this tactic.
- If the spill is in still water under calm conditions, consider Containment Booming.
- Boom control devices, such as the Boom Vane™, allow diversion booms to be set and retrieved from shore without a vessel. They also allow for continuous adjustment of boom angles.
- Do not assume 100% efficiency with one boom system.
- When deployed by vessels/crews of opportunity, remember that this tactic requires more training and skill than towing a U-boom.
- Readjust angles and widths between boom sections as necessary to meet changing conditions.
- Continuous monitoring of system efficiency is required.
- Deployment planning for a marine environment should be based on average high tidal conditions.








Diversion Boom

- A Title 41 Fish Habitat permit is required to work inside any anadromous stream. Due to the possibility of contaminating spawning habitat, avoid diverting and/or collecting oil inside a stream mouth if possible.
- See Shoreside Recovery for methods to keep oil from contaminating beaches at recovery points.

REFERENCES TO OTHER TACTICS

Other tactics associated with diversion boom and recovery include:

-  • Shoreside Recovery
-  • Marine Recovery
-  • On-water Free-oil Recovery
-  • Deflection Booming
-  • Containment Booming

EQUIPMENT AND PERSONNEL RESOURCES

Resources for this tactic include: vessels; boom; anchoring, mooring, or control systems; and response personnel. Configuration and specific resources required will be determined by site conditions, spilled oil type and volume, area of coverage, as well as resource availability. Resource sets may need to be refined as site-specific requirements dictate.

Open Water Diversion Boom System*



Equipment	Function	Quantity	Notes
Oil boom, > 36" height	Divert and concentrate oil	Site-specific	Depending on configuration, currents, sea states and oil concentration
Large anchor systems, boom control devices, or shore-based anchors	Keep boom in selected configuration	Site specific	Depending on configuration, currents, and sea states
Recovery System	Collect oil	Site Specific	Select the appropriate recovery system for the situation, see recovery options in Configurations sub-section
Vessel	Function	Quantity	Notes
Class 2, 3, 4 or 5 <i>At least one vessel with a crane is recommended</i>	Deploying/tending anchors and boom	2 to 4	Depending on configuration, currents, and sea states
Personnel	Function	Quantity	Notes
Field Team Leader	Supervise operations	1	
Vessel Operators, Open water	Masters of response vessels	2 to 4	Depending on number of vessels
Skilled Technicians	Crews vessels and operates response equipment	2 to 4	Depending on number of vessels, configuration, recovery system
General Technicians	Work under the direction of skilled technicians or vessel operators	2 to 8	Depending on number of vessels, configuration, recovery system

*Diversion Boom is not recommended for open-water environment.

**Diversion Boom****Protected Water Diversion Boom System****DV-P**

Equipment	Function	Quantity	Notes
Oil boom, 18" to 42" height	Divert and concentrate oil	Site-specific	Depending on configuration, currents, sea states and oil concentration
Tidal-seal boom	Seal containment across the inter-tidal zone	Site-specific, optional	Best for sand and gravel beaches
Medium anchor systems, boom control devices, or shore-based anchors	Secure boom in selected configuration	Rule of Thumb 1 anchor per 200 ft. of boom	Depending on configuration, currents, and sea states
Recovery System	Collect oil	Site-specific	Select the appropriate recovery system for the situation, see recovery options in Configurations sub-section
Vessel	Function	Quantity	Notes
Class 3, 4 or 5 At least one vessel with a crane is recommended	Deploying/tending anchors and boom	2 to 4	Depending on configuration, currents, and sea states
Personnel	Function	Quantity	Notes
Field Team Leader	Supervise operations	1	May not always be on-site
Vessel Operators, Protected/Calm-water	Masters of response vessels	2 to 4	Depending on number of vessels
Skilled Technicians	Crews vessels and operates response equipment	2 to 4	Depending on number of vessels, configuration, recovery system
General Technicians	Work under the direction of skilled technicians or vessel operators	2 to 8	Depending on number of vessels, configuration, recovery system

Calm Water Diversion Boom System**DV-C**

Equipment	Function	Quantity	Notes
Oil boom, 6" to 24" height	Divert and concentrate oil	Site-specific	Depending on configuration, currents, sea states and oil concentration
Tidal-seal boom	Seal containment across the inter-tidal zone	Site-specific, optional	Best for sand and gravel beaches
Small anchor systems, boom control devices, or shore-based anchors	Secure boom in selected configuration	Rule of Thumb 1 anchor per 200 ft. of boom	Depending on configuration, currents, and sea states
Recovery System	Collect oil	Site-specific	Select the appropriate recovery system for the situation, see recovery options in Configurations sub-section
Vessel	Function	Quantity	Notes
Class 3, 4 or 5 At least one vessel with a crane is recommended	Deploying/tending anchors and boom	1 to 3	Depending on configuration, currents, and sea states
Personnel	Function	Quantity	Notes
Field Team Leader	Supervise operations	1	
Vessel Operators, Protected/Calm-water	Masters of response vessels	1 to 3	Depending on number of vessels
Skilled Technicians	Crews vessels and operates response equipment	2 to 3	Depending on number of vessels, configuration, recovery system
General Technicians	Work under the direction of skilled technicians or vessel operators	2 to 8	Depending on number of vessels, configuration, recovery system

Diversion Boom



Fast Water Diversion Boom System



Equipment	Function	Quantity	Notes
Oil boom, 8" to 24" height	Divert and concentrate oil	Site-specific	Depending on configuration, currents, sea states and oil concentration
Small anchor systems, boom control devices, or shore-based anchors	Secure boom in selected configuration	Rule of Thumb 1 anchor per 200 ft. of boom	Depending on configuration, currents, and sea states
Recovery System	Collect oil	Site-specific	Select the appropriate recovery system for the situation, see recovery options in Configurations sub-section
Vessel	Function	Quantity	Notes
Class 3, 4 or 5	Deploying/tending anchors and boom	1 to 3	Depending on configuration, currents, and sea states
Personnel	Function	Quantity	Notes
Field Team Leader	Supervise operations	1	
Vessel Operators, Protected/Calm-water	Masters of response vessels	1 to 3	Depending on number of vessels
Skilled Technicians	Crews vessels and operates response equipment	2 to 3	Depending on number of vessels, configuration, recovery system
General Technicians	Work under the direction of skilled technicians or vessel operators	2 to 8	Depending on number of vessels, configuration, recovery system

B.
MECH.